


**ORDERING INFORMATION FOR ETR-8300 SMARTER LOGIC®
MICROPROCESSOR BASED TEMPERATURE CONTROLS**

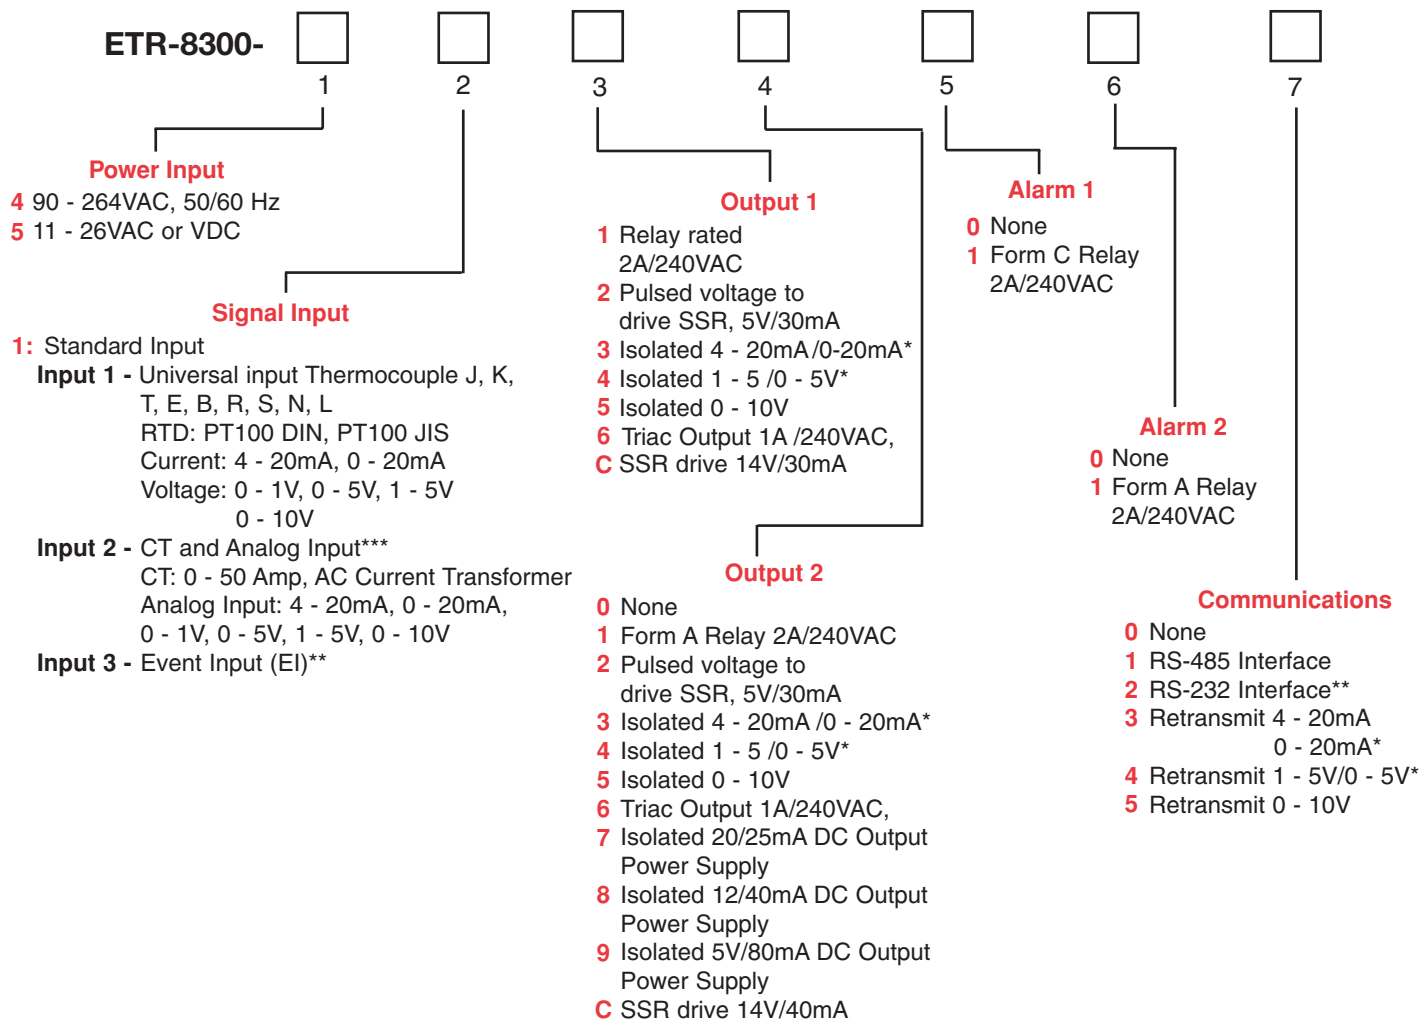

Example:
Standard Model
ETR-8300-4111111

- 90 - 264VAC Operating Voltage
- Input: Set 1 Universal Input
- Output 1: Relay
- Output 2: Relay
- Alarm 1: Form C Relay
- Alarm 2: Form A Relay
- RS-485 Communication Interface

- * Range set by front keyboard
- ** Alternative between RS-232 and Event Input
- *** Order CT94-1 if Heater Break Function is required.

ACCESSORIES			
CC94-1 SNA10A	RS-232 Interface Cable (2M) Smart Network Adapter for Third Party Software. Converts one channel of RS-485 or RS-422 to RS-232 Network	SNA10B	Smart Network Adapter for ETR-Net Software. Converts 255 channels of RS-485 or RS-422 to RS-232 Network